

Project: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Model# \_\_\_\_\_

## DL 4 RSE

4" Round Smooth Down Light

### DESCRIPTION

4" LED Round Down Light, DL 4 RSE is compatible with most 4" standard recessed new construction and remodel housings. The Retrofit Kit comes with an E26 medium screw-base Edison adapter for easy installation into standard incandescent sockets.

### PRODUCT SPECIFICATIONS

- White painted stamped aluminum body.
- Oversized trim ring.
- 3 Tension clips per-installed on unit for easy installation.
- E26 medium screw-base Edison adapter provides easy installation into Incandescent housings.  
(GU10 and GU24 socket adapter available - sold separately)

### LED LIGHT ENGINE

- Protected LED driver performs at 120V.
- Dimming down to 10% with most TRIAC dimmers (at 120V only).
- CCT 2700K, 3000K, 4000K, 5000K available
- CRI 90
- Long life LED chips guaranteed up to 50,000 hours.

### LISTINGS


- cULus classified
- Energy star qualified
- Wet locations (Not suitable for coastal/salt water area)
- RoHS compliances
- Tested in accordance with IESNA LM79 & LM80

### PERFORMANCE DATA


	3000K
Input Voltage	120V
Input Power	11W
Frequency	50 / 60Hz
Operation temp	-22°F ~ 104°F
Lumens	630
CRI	90



### DIMENSIONS

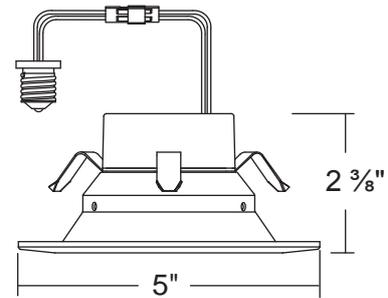

### PHOTOMETRIC

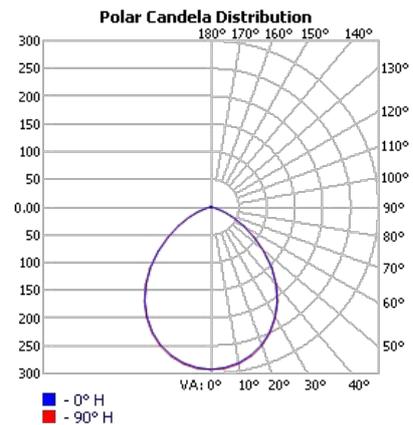

Standard Models	Style	Watts	Lumens	Kelvin	Volt	Finish
DL 4 RSE 23 11 27K Z W	Round Smooth	11	600	2700K**	120	White
DL 4 RSE 23 11 30K Z W	Round Smooth	11	630	3000K	120	White
DL 4 RSE 23 11 40K Z W	Round Smooth	11	690	4000K**	120	White
DL 4 RSE 23 11 50K Z W	Round Smooth	11	730	5000K	120	White

\*\* Special Order

