

Project: _____
 Type: _____
 Model# _____

DL 4 SSE

4" Square Smooth Down Light

DESCRIPTION

4" LED Square Down Light, DL 4 SSE is compatible with most 4" standard recessed new construction and remodel housings. The Retrofit Kit comes with an E26 medium screw-base Edison adapter for easy installation into standard incandescent sockets.

PRODUCT SPECIFICATIONS

- White painted stamped aluminum body.
- Oversized trim ring.
- 3 Tension clips per-installed on unit for easy installation.
- E26 medium screw-base Edison adapter provides easy installation into Incandescent housings.
(GU10 and GU24 socket adapter available - sold separately)

LED LIGHT ENGINE

- Protected LED driver performs at 120V.
- Dimming down to 10% with most TRIAC dimmers (at 120V only).
- CCT 2700K, 3000K, 4000K, 5000K available
- CRI 90
- Long life LED chips guaranteed up to 50,000 hours.

LISTINGS


- cULus classified
- Energy star qualified
- Wet locations (Not suitable for coastal/salt water area)
- RoHS compliances
- Tested in accordance with IESNA LM79 & LM80

PERFORMANCE DATA


	3000K
Input Voltage	120V
Input Power	11W
Frequency	50 / 60Hz
Operation temp	-22°F ~ 104°F
Lumens	690
CRI	90



DIMENSIONS

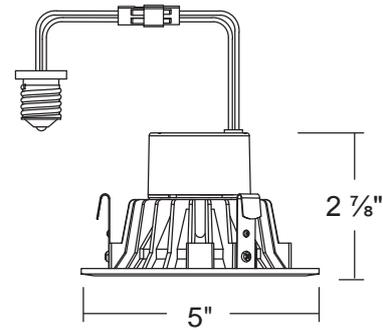

PHOTOMETRIC

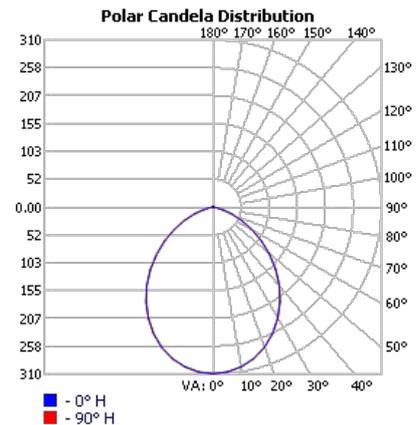

Standard Models	Style	Watts	Lumens	Kelvin	Volt	Finish
DL 4 SSE 23 11 27K Z W	Square Smooth	11	730	2700K**	120	White
DL 4 SSE 23 11 30K Z W	Square Smooth	11	690	3000K	120	White
DL 4 SSE 23 11 40K Z W	Square Smooth	11	740	4000K	120	White
DL 4 SSE 23 11 50K Z W	Square Smooth	11	780	5000K	120	White

** Special Order

