

Project: _____
 Type: _____
 Model#: _____

DL SP6

6" Square Panel LED

DESCRIPTION

6" LED Square Panel Light, DL SP6 consists of one trim of die-cast body and J-Box with driver. No housing is needed and installation is easy and fast.

PRODUCT SPECIFICATIONS

- White painted Diecast body is appropriate for heat dissipation.
- 2 Plastic clips pre-installed on unit for easy installation.
- One light J - Box

LED LIGHT ENGINE

- Protected LED driver performs at 120V (120-277V available).
- Dimming down to 10% with TRIAC dimmer (**at 120V only**).
- CCT 2700K, 3000K, 4000K, 5000K available
- CRI 90
- Long life LED chips guaranteed up to 50,000hours.

LISTINGS

- cULus Listed
- Wet locations
- RoHS compliances
- Tested in accordance with IESNA LM79 & LM80


PERFORMANCE DATA

3000K


Input Voltage	120V / 120-277V*
Input Power	15W
Frequency	50 / 60Hz
Operation temp	-22°F ~ 104°F
Lumens	1,032
CRI	90



DIMENSIONS

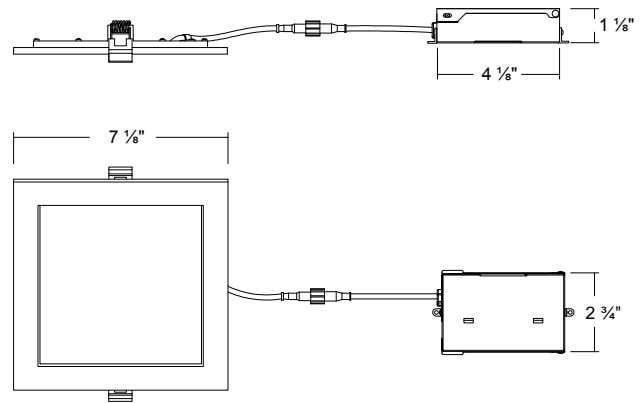

PHOTOMETRIC

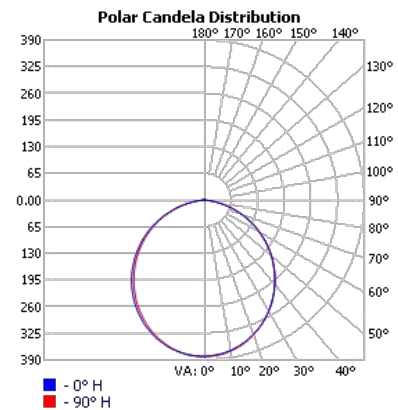

Standard Models		Style	Watts	Lumens	Kelvin	Volts	Beam	Finish
DL SP6 15 27K Z W	DL SP6 15 27K Y W	Square Panel	15	969	2700K	Z=120V / Y=120-277V*	120°	White
DL SP6 15 30K Z W	DL SP6 15 30K Y W	Square Panel	15	1,032	3000K	Z=120V / Y=120-277V*	120°	White
DL SP6 15 40K Z W	DL SP6 15 40K Y W	Square Panel	15	1,112	4000K	Z=120V / Y=120-277V*	120°	White
DL SP6 15 50K Z W	DL SP6 15 50K Y W	Square Panel	15	1,024	5000K	Z=120V / Y=120-277V*	120°	White

Z = 120 Volts

* Y = 120-277 Volts

